

使用范围Application


F4(LA1)系列辅助触头可装于JZC4系列接触式继电器顶部，作为扩大触头对数之用，辅助触头组采用滑动摩擦接触功能，保证电路可靠接通，F4系列辅助触头组分8个规格，F4-11、20、13、31、22等。

F4(LA1) series auxiliary contact group can be fixed on top of JZC4 series contactor type relay of CJX2 series AC contactor, it is used to enlarge the number for auxiliary contact pairs. Contact function of sliding is adopted in auxiliary group, it can self-clean, so as to ensure making circuit. F4 series auxiliary contact group is divided into 8 following specs: F4-11, 20, 13, 31, 22.



F4-11

辅助触头的含义Auxiliary Contacts Meaning

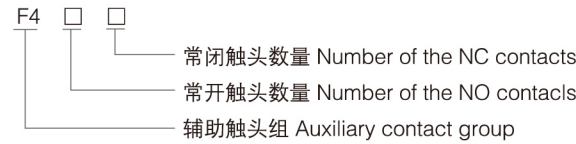

接触器可与下表中任一附件装置

The contactor can be assembled with any accessories indicated in the following table.


辅助触头组Auxiliary contact group



F4-22

型号Type	触头数量Number of the contacts
F4-02	2NC
F4-11	1NO+1NC
F4-20	2NO
F4-22	2NO+2NC
F4-40	4NO
F4-04	4NC
F4-13	1NO+3NC
F4-31	3NO+1NC

空气延时的型号含义Air Time-Delay Type And Meaning

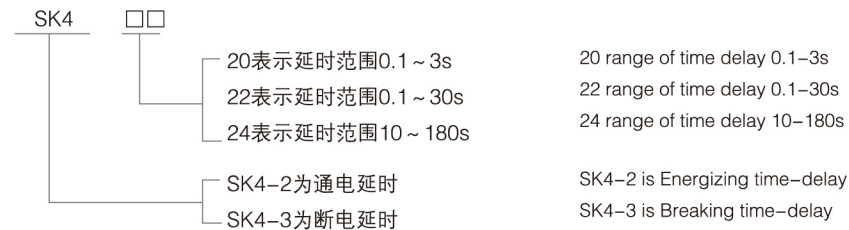

SK4

空气延时头Air time-delay

型号Type	延时范围 Range of time delay	延时触头数量 Qty. of time delay contact
SK4-220	0.1 ~ 3s	NO+NC
SK4-222	0.1 ~30s	
SK4-224	10~180s	
SK4-320	0.1 ~3s	
SK4-322	0.1~30s	
SK4-324	10~180s	